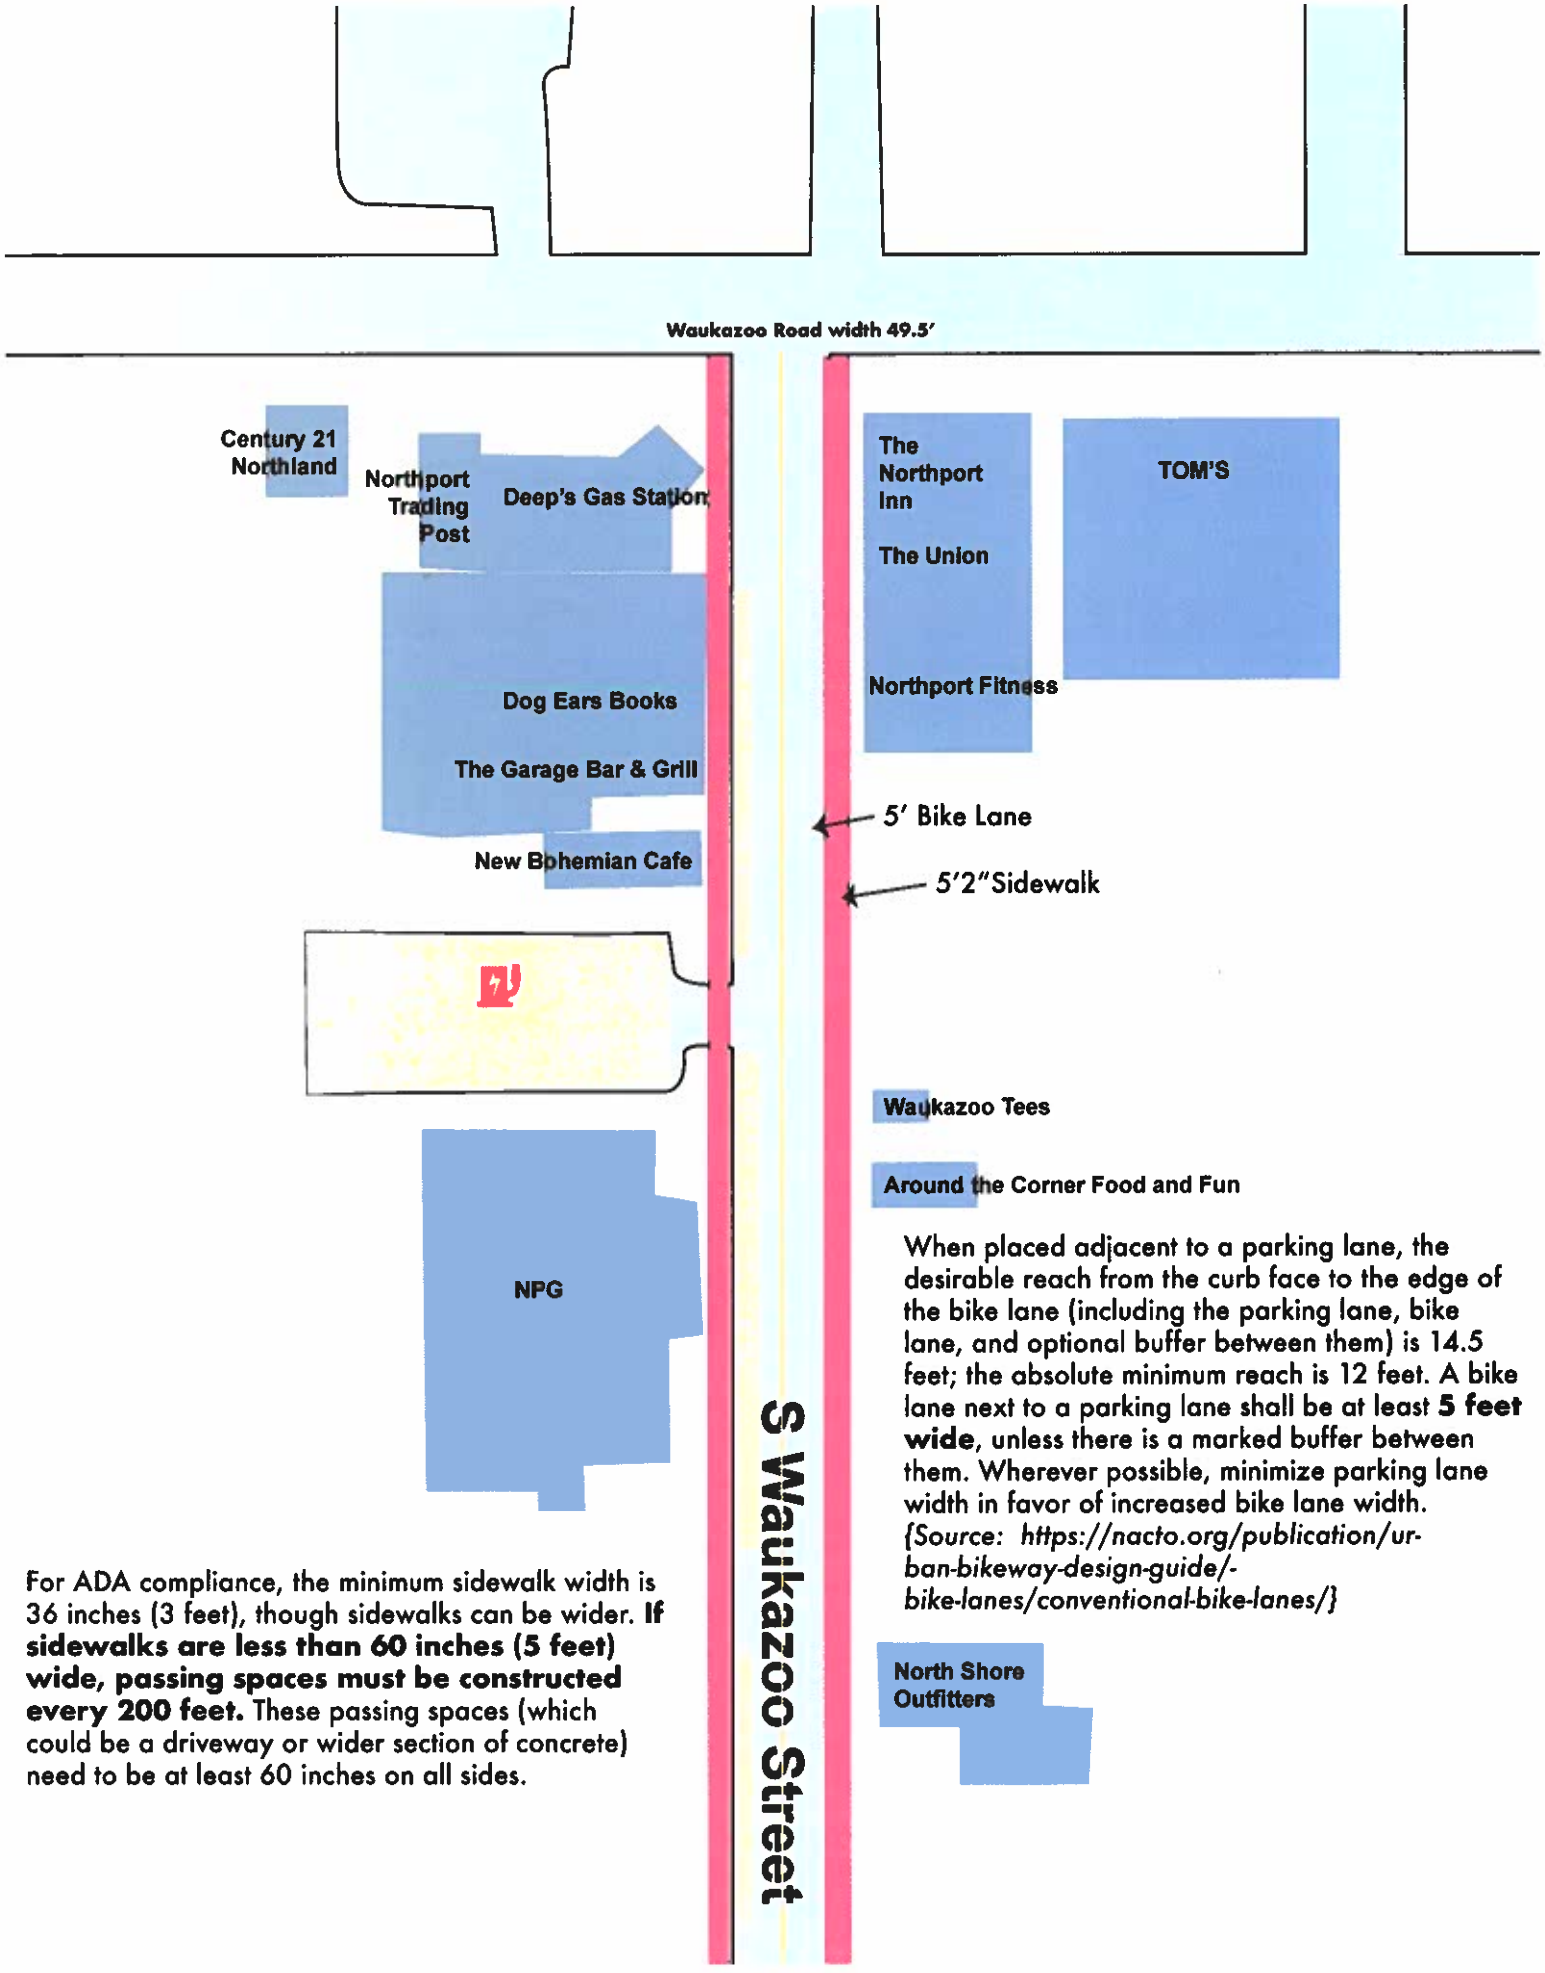

When placed adjacent to a parking lane, the desirable reach from the curb face to the edge of the bike lane (including the parking lane, bike lane, and optional buffer between them) is 14.5 feet; the absolute minimum reach is 12 feet. A bike lane next to a parking lane shall be at least **5 feet wide**, unless there is a marked buffer between them. Wherever possible, minimize parking lane width in favor of increased bike lane width. *{Source: https://nacto.org/publication/urban-bikeway-design-guide/-bike-lanes/conventional-bike-lanes/}*

For ADA compliance, the minimum sidewalk width is 36 inches (3 feet), though sidewalks can be wider. **If sidewalks are less than 60 inches (5 feet) wide, passing spaces must be constructed every 200 feet.** These passing spaces (which could be a driveway or wider section of concrete) need to be at least 60 inches on all sides.

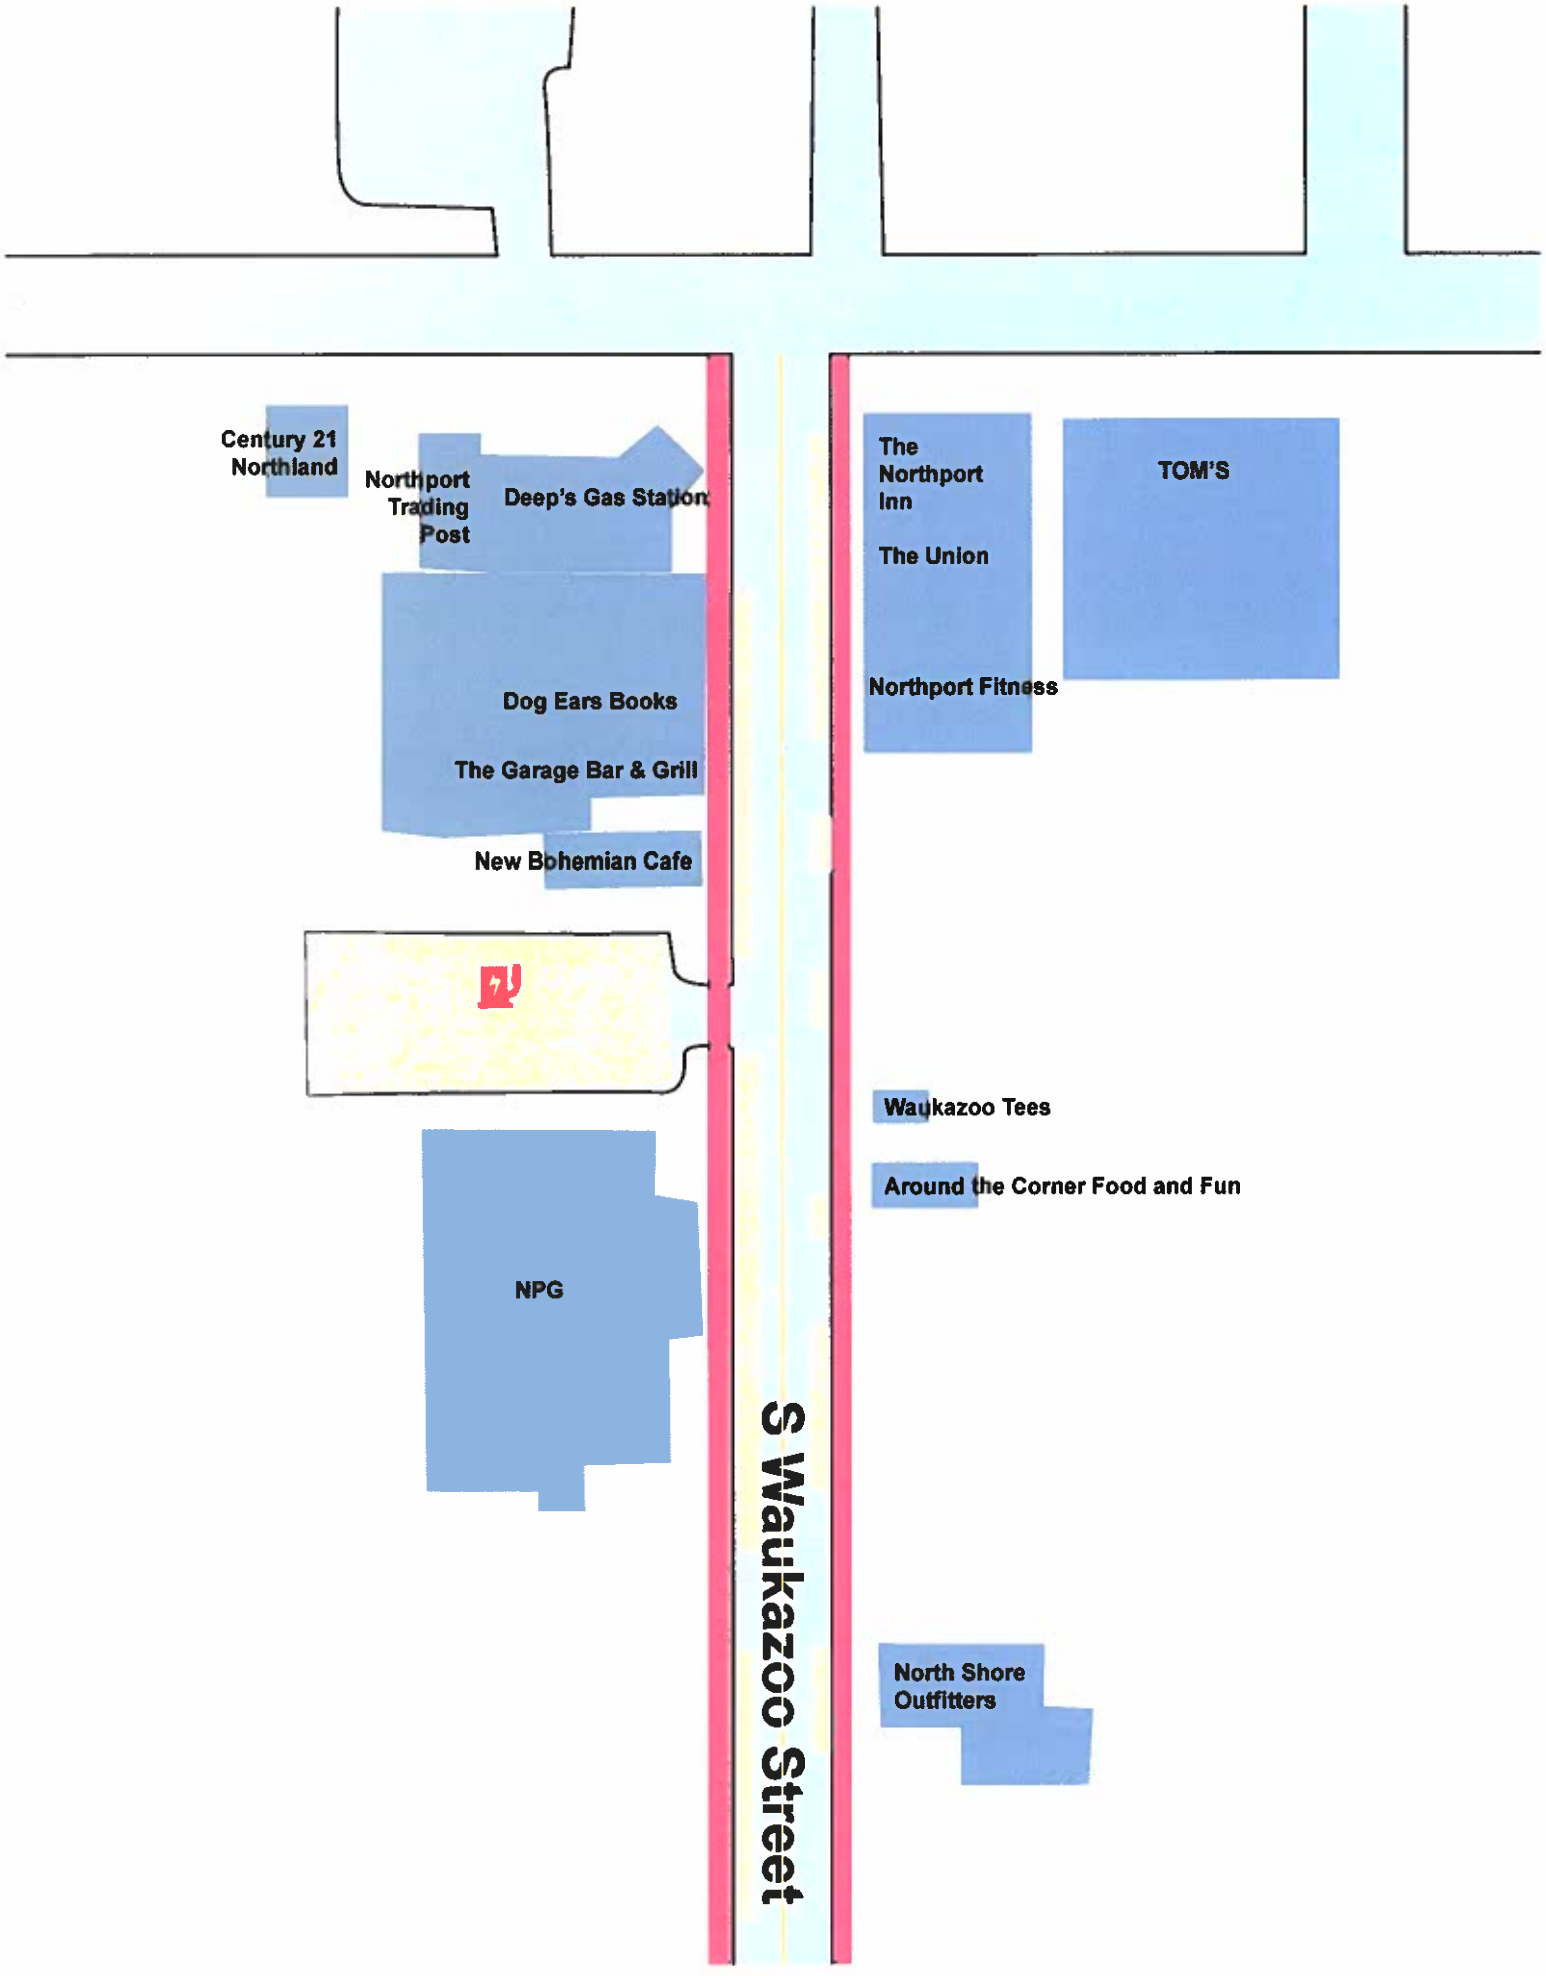
Century 21 Northland
Northport Trading Post
Deep's Gas Station
Dog Ears Books
The Garage Bar & Grill
New Bohemian Cafe
NPG
The Northport Inn
The Union
Northport Fitness
TOM'S
Waukazoo Tees
Around the Corner Food and Fun
North Shore Outfitters
S Waukazoo Street