Sourcewell Awarded Contract

Contract # 060920-NVS

International Trucks is pleased to provide you with this proposal compliant with all terms of the Sourcewell Vehicles and Chassis Contract #060920-NVS awarded to Navistar, Inc for new International Trucks. If you have any questions regarding enrollment in Sourcewell or detailed contract terms and conditions, please see your International Truck sales representative.

	PROPOSAL PREPARED FOR:	PROPOSAL PREPARED BY:
Sourcewell Member:	VILLAGE OF NORTHPORT	ZAREMBA EQUIPMENT INC.
Contact:	JONI SCOTT / CHRIS HOLTON	ROGER HANSEN
Address:	116 WEST NAGONABA	1734 DICKERSON ROAD
City/State/Zip:	NORTHPORT, MICHIGAN 49670	GAYLORD, MICHIGAN 49735
Phone:	231-386-5781	989-705-7664
Email:	clerk@villageofnorthport.net	roger@zarembaequipment.com

Proposal Number	2499-01
Date	1/12/2021
Quantity of this Specification	1
Single Sourcewell Transaction Total Volume	

Chassis			
New 2021 International HV507 4x2 Chassis			$ 143,597.00
Base Chassis List	$ 99,791.00		
Options List	$ 43,806.00		
Sourcewell Contract Discount		34.5%	$ (49,540.97)
Volume Incentive			$ -
Net Sourcewell Chassis Price			$ 94,056.04
Sourcewell Partner Body			
			$ -
			$ -
		4.00%	$ -
Non-Sourcewell Dealer Supplied Body			
			$ -
			$ -
Handling Fee		5.00%	$ -
Additional Post Build Work			
			$ -
			$ -
			$ -
			$ -
			$ -
			$ -
Handling Fee		5.00%	$ -
Service Contracts			
			$ -
			$ -
			$ -
Additional Freight			
			$ -
			$ -
Additional Floorplan			
			$ -
			$ -
Additional Fees & Taxes			
			$ -
			$ -
			$ -
Final Sourcewell Customer Price FOB			**$ 94,000.00**

Terms: CHASISS DUE 10 DAYS AFTER ACCEPTANCE

Prepared For:
Village Of Northport
Chris Holpon
116 W Nagonaba St.
Northport, MI 49670-5018
(231)432 - 0351
Reference ID: N/A

Presented By:
ZAREMBA EQUIP INC
Roger E Hansen
1734 DICKERSON ROAD
GAYLORD MI 49735 -
(989)705-7664

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

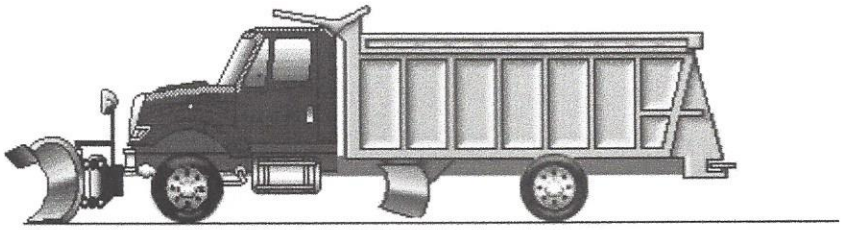

Model Profile
2021 HV507 SFA (HV507)

AXLE CONFIG:	4X2
APPLICATION:	Front Plow and Underbelly Scraper with Spreader
MISSION:	Requested GVWR: 39000. Calc. GVWR: 39360 Calc. Start / Grade Ability: 43.16% / 2.83% @ 55 MPH Calc. Geared Speed: 67.4 MPH
DIMENSION:	Wheelbase: 183.00, CA: 108.00, Axle to Frame: 67.00
ENGINE, DIESEL:	{Cummins L9 300} EPA 2021, 300HP @ 2200 RPM, 860 lb-ft Torque @ 1200 RPM, 2200 RPM Governed Speed, 300 Peak HP (Max)
TRANSMISSION, AUTOMATIC:	{Allison 3500 RDS} 5th Generation Controls, Wide Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, with 80,000-lb GVW and GCW Max, On/Off Highway
CLUTCH:	Omit Item (Clutch & Control)
AXLE, FRONT NON-DRIVING:	{Meritor MFS-16-143A} Wide Track, I-Beam Type, 16,000-lb Capacity
AXLE, REAR, SINGLE:	{Meritor RS-30-185} Single Reduction, 30,000-lb Capacity, Driver Controlled Locking Differential, T Wheel Ends Gear Ratio: 6.14
CAB:	Conventional, Day Cab
TIRE, FRONT:	(2) 315/80R22.5 Load Range L G289 WHA (GOODYEAR), 484 rev/mile, 68 MPH, All-Position
TIRE, REAR:	(4) 11R22.5 Load Range G HDR2 ECO PLUS (CONTINENTAL), 491 rev/mile, 75 MPH, Drive
SUSPENSION, REAR, SINGLE:	31,000-lb Capacity, Vari-Rate Springs, with (3) Torque Rods
PAINT:	Cab schematic 100WK Location 1: 2303, Red (Std) Chassis schematic N/A

Code	Description
HV50700	Base Chassis, Model HV507 SFA with 183.00 Wheelbase, 108.00 CA, and 67.00 Axle to Frame.
1ANA	AXLE CONFIGURATION {Navistar} 4x2
	Notes : Pricing may change if axle configuration is changed.
1CGE	FRAME RAILS Heat Treated Alloy Steel (125,000 PSI Yield); 11.25" x 4.00" x 0.500" (285.75mm x 101.6mm x 12.7mm); 480.8" (12212mm) Maximum OAL
1LLA	BUMPER, FRONT Swept Back, Steel, Heavy Duty
1WDS	FRAME EXTENSION, FRONT Integral; 20" In Front of Grille
1WEV	WHEELBASE RANGE 146" (370cm) Through and Including 195" (495cm)
2ARU	AXLE, FRONT NON-DRIVING {Meritor MFS-16-143A} Wide Track, I-Beam Type, 16,000-lb Capacity
3AHU	SUSPENSION, FRONT, SPRING Multi-Stage Parabolic Taper Leaf, Shackle Type, 20,000-lb Capacity, with Shock Absorbers
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications
	Includes : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : PARKING BRAKE VALVE For Truck : QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4/8x6
4722	DRAIN VALVE {Bendix DV-2} Automatic, with Heater, for Air Tank
4AZJ	AIR BRAKE ABS {Bendix AntiLock Brake System} 4-Channel (4 Sensor/4 Modulator) Full Vehicle Wheel Control System, with Automatic Traction Control
4EBD	AIR DRYER {Wabco System Saver 1200} with Heater
4EXU	BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 SqIn Spring Brake
4EXV	BRAKE CHAMBERS, FRONT AXLE {Bendix} 24 SqIn
4LAG	SLACK ADJUSTERS, FRONT {Gunite} Automatic
4LGG	SLACK ADJUSTERS, REAR {Gunite} Automatic
4SPA	AIR COMPRESSOR {Cummins} 18.7 CFM
4VHZ	AIR TANK LOCATION (2) Mounted Under Cab, Outside Left Rail, on Step Bracket, with Ground Clearance
4VKC	AIR DRYER LOCATION Mounted Inside Left Rail, Back of Cab
4WBX	DUST SHIELDS, FRONT BRAKE for Air Cam Brakes
4WDM	DUST SHIELDS, REAR BRAKE for Air Cam Brakes
4XDB	BRAKES, REAR {Bendix Spicer ES-165-7H} Air S-Cam Type, Heavy Duty Cast Spider, Cast Shoe, Double Anchor Pin, Size 16.5" X 7", 45,000-lb Capacity per Axle
4XDL	BRAKES, FRONT {Bendix Spicer ES-165-6X} Air S-Cam Type, Heavy Duty Fabricated Spider, Fabricated Shoe, Single Anchor Pin, Size 16.5" X 6", 23,000-lb Capacity
5708	STEERING COLUMN Tilting
5CAW	STEERING WHEEL 4-Spoke; 18" Dia., Black

Code	Description
5PTB	STEERING GEAR (2) {Sheppard M100/M80} Dual Power
6DGB	DRIVELINE SYSTEM {Dana Spicer} SPL140, for 4x2/6x2
7BEV	AFTERTREATMENT COVER Steel, Black
7BMB	EXHAUST SYSTEM Horizontal Aftertreatment System, Frame Mounted Right Side Under Cab, for Single Vertical Tail Pipe, Frame Mounted Right Side Back of Cab, for Improved Ground Clearance
7WAZ	TAIL PIPE (1) Turnback Type
7WDM	EXHAUST HEIGHT 10'
7WDN	MUFFLER/TAIL PIPE GUARD (1) Aluminum
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment Includes : DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab : HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel : HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever : PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light : STARTER SWITCH Electric, Key Operated : STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector : TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature : WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever : WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted : WIRING, CHASSIS Color Coded and Continuously Numbered
8GXD	ALTERNATOR {Leece-Neville AVI160P2013} Brush Type, 12 Volt, 160 Amp Capacity, Pad Mount, with Remote Sense
8HAB	BODY BUILDER WIRING Back of Day Cab at Left Frame or Under Sleeper, Extended or Crew Cab at Left Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/Accessory Power/Ground and Sealed Connector for Stop/Turn
8HXT	HORN, AIR (2) Single Tone, Chrome, Roof Mounted, with Lanyard Pull Cord
8MMG	BATTERY SYSTEM {Deka/EAST PENN 9A31 AGM} Maintenance-Free, (3) AGM 12-Volt 2775CCA Total, Top Threaded Stud
8REA	2-WAY RADIO Wiring Effects; Wiring with 20 Amp Fuse Protection, Includes Ignition Wire with 5 Amp Fuse, Wire Ends Heat Shrink and 10' Coil Taped to Base Harness
8RMV	SPEAKERS (2) 6.5" Dual Cone Mounted in Doors
8RPS	RADIO AM/FM/WB/Clock/Bluetooth/USB Input/Auxiliary Input
8THB	BACK-UP ALARM Electric, 102 dBA
8TNP	AUXILIARY HARNESS 5.0' for Auxiliary Front Head Lights and Turn Signals for Front Plow Applications
8VAY	HORN, ELECTRIC Disc Style
8WGL	WINDSHIELD WIPER SPD CONTROL Force Wipers to Slowest Intermittent Speed When Park Brake Set and Wipers Left on for a Predetermined Time
8WPH	CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade
8WPZ	TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights
8WTK	STARTING MOTOR {Delco Remy 38MT Type 300} 12 Volt, Less Thermal Over-Crank Protection
8WWJ	INDICATOR, LOW COOLANT LEVEL with Audible Alarm

Code	Description
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses
8XGT	TURN SIGNALS, FRONT Includes LED Side Turn Lights Mounted on Fender
8XHZ	BATTERY BOX Steel, 2-3 Battery Capacity, Mounted Inside the Cab, Under Passenger Seat, with High Ground Clearance Exhaust
9AAB	LOGOS EXTERIOR Model Badges
9AAE	LOGOS EXTERIOR, ENGINE Badges
9HBM	GRILLE Stationary, Chrome
9WBC	FRONT END Tilting, Fiberglass, with Three Piece Construction, for WorkStar/HV
10021	CHASSIS COATING Corrosion Resistant E-Coat Primer Coating for Single Frame Rails
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100
	Includes : PAINT SCHEMATIC ID LETTERS "WK"
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone
10JPA	CUSTOMER IDENTITY for Sourcewell
10SLV	PROMOTIONAL PACKAGE Government Silver Package
11001	CLUTCH Omit Item (Clutch & Control)
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection
12849	BLOCK HEATER, ENGINE 120V/1000W, for Cummins ISB/B6.7/ISL/L9 Engines
	Includes : BLOCK HEATER SOCKET Receptacle Type; Mounted below Drivers Door
12851	PTO EFFECTS, ENGINE FRONT Less PTO Unit, Includes Adapter Plate on Engine Front Mounted
12ESL	ENGINE, DIESEL {Cummins L9 300} EPA 2021, 300HP @ 2200 RPM, 860 lb-ft Torque @ 1200 RPM, 2200 RPM Governed Speed, 300 Peak HP (Max)
12THT	FAN DRIVE {Horton Drivemaster} Two-Speed Type, Direct Drive, with Residual Torque Device for Disengaged Fan Speed
	Includes : FAN Nylon
12UWY	RADIATOR Aluminum, Cross Flow, Front to Back System, 1228 SqIn, with 1167 SqIn Charge Air Cooler
	Includes : DEAERATION SYSTEM with Surge Tank : HOSE CLAMPS, RADIATOR HOSES Gates Shrink Band Type; Thermoplastic Coolant Hose Clamps : RADIATOR HOSES Premium, Rubber
12VAG	AIR CLEANER Single Element, with Integral Snow Valve and In-Cab Control
12VHR	FEDERAL EMISSIONS {Cummins L9} EPA, OBD and GHG Certified for Calendar Year 2021
12VXT	THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel
12VYL	ACCESSORY WIRING, SPECIAL for Road Speed Wire Coiled Under Instrument Panel for Customer Use
12WZE	EMISSION COMPLIANCE Federal, Does Not Comply with California Clean Air Idle Regulations
12XBM	ENGINE CONTROL, REMOTE MOUNTED Provision for; Includes Wiring for Body Builder Installation of PTO Controls and Starter Lockout, with Ignition Switch Control, for Cummins B6.7 and L9 Engines

Code	Description
13AVL	TRANSMISSION, AUTOMATIC {Allison 3500 RDS} 5th Generation Controls, Wide Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, with 80,000-lb GVW and GCW Max, On/Off Highway
13WAW	OIL COOLER, AUTO TRANSMISSION {Modine} Water to Oil Type
13WET	TRANSMISSION SHIFT CONTROL Column Mounted Stalk Shifter, Not for Use with Allison 1000 & 2000 Series Transmission
13WLP	TRANSMISSION OIL Synthetic; 29 thru 42 Pints
13WUC	ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS) and Regional Haul Series (RHS), General Purpose Trucks, Construction, Package Number 223
13WVV	NEUTRAL AT STOP Allison Transmission Shifts to Neutral When Service Brake is Depressed and Vehicle is at Stop; Remains in Neutral Until Service Brake is Released
13WYH	TRANSMISSION TCM LOCATION Located Inside Cab
13WYU	SHIFT CONTROL PARAMETERS {Allison} 3000 or 4000 Series Transmissions, Performance Programming
13XAM	PTO LOCATION Dual, Customer Intends to Install PTO at Left and/or Right Side of Transmission
14ASD	AXLE, REAR, SINGLE {Meritor RS-30-185} Single Reduction, 30,000-lb Capacity, Driver Controlled Locking Differential, T Wheel Ends . Gear Ratio: 6.14 Notes : Axle Lead Time is 60 Days
14SCD	SUSPENSION, REAR, SINGLE 31,000-lb Capacity, Vari-Rate Springs, with (3) Torque Rods
14WMH	AXLE, REAR, LUBE {EmGard FE-75W-90} Synthetic Oil; 40 thru 49.99 Pints
15LMK	LOCATION FUEL/WATER SEPARATOR Mounted Outside Left Rail, 54" Back of Cab
15LNS	FUEL/WATER SEPARATOR {Racor 400 Series} 12 VDC Electric Heater, Includes Pre-Heater, with Primer Pump, Includes Water-in-Fuel Sensor, Mounted on Engine
15SSC	FUEL TANK Temporary, Top Draw, Non-Polished Aluminum, D-Style, 16" Tank Depth, 50 US Gal (189L), Mounted Left Side, Back of Cab
15WDG	DEF TANK 7 US Gal (26L) Capacity, Frame Mounted Outside Left Rail, Under Cab
16030	CAB Conventional, Day Cab
16BAM	AIR CONDITIONER with Integral Heater and Defroster
16GDC	GAUGE CLUSTER Base Level; English with English Speedometer and Tachometer, for Air Brake Chassis, Includes Engine Coolant Temperature, Primary and Secondary Air Pressure, Fuel and DEF Gauges, Oil Pressure Gauge, Includes 3 Inch Monochromatic Text Display
16GHU	GRAB HANDLE, CAB INTERIOR (2) Safety Yellow
16HGH	GAUGE, OIL TEMP, AUTO TRANS for Allison Transmission
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster
16JNV	SEAT, DRIVER {National 2000} Air Suspension, High Back with Integral Headrest, Cloth, Isolator, 1 Chamber Lumbar, 2 Position Front Cushion Adjust, -3 to +14 Degree Back Angle Adjust
16SEE	GRAB HANDLE, EXTERIOR Chrome, Towel Bar Type, with Anti-Slip Rubber Inserts, for Cab Entry Mounted Left Side at B-Pillar
16SMX	SEAT, PASSENGER {Seats, Inc.} Non Suspension, High Back, Fixed Back, Integral Headrest, Cloth, for use with Batteries in Cab

Code	Description
16SNR	MIRRORS (2) C-Loop, Power Adjust, Heated, LED Clearance Lights, Bright Heads and Arms, 7.5" x 14" Flat Glass, Includes 7.5" x 7" Convex Mirrors, for 102" Load Width Notes : Mirror Dimensions are Rounded to the Nearest 0.5"
16VKB	CAB INTERIOR TRIM Classic, for Day Cab Includes : CONSOLE, OVERHEAD Molded Plastic with Dual Storage Pockets, Retainer Nets and CB Radio Pocket; Located Above Driver and Passenger : DOME LIGHT, CAB Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Overhead Console, Center Mounted : SUN VISOR (2) Padded Vinyl; 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Toll Ticket Strap
16VSL	WINDSHIELD Heated, Single Piece
16WEE	CAB SOUND INSULATION Includes Dash Insulator and Engine Cover Insulator
16WJU	WINDOW, POWER (2) and Power Door Locks, Left and Right Doors, Includes Express Down Feature
16WLS	FRESH AIR FILTER Attached to Air Intake Cover on Cowl Tray in Front of Windshield Under Hood
16WSK	CAB REAR SUSPENSION Air Bag Type
16XJN	INSTRUMENT PANEL Flat Panel
16ZBT	ACCESS, CAB Steel, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab and Extended Cab
27DUL	WHEELS, FRONT {Accuride 29300} DISC; 22.5x9.00 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs
28DUK	WHEELS, REAR {Accuride 29169} DUAL DISC; 22.5x8.25 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with .472" Thick Increased Capacity Disc and Steel Hubs
7372135434	(4) TIRE, REAR 11R22.5 Load Range G HDR2 ECO PLUS (CONTINENTAL), 491 rev/mile, 75 MPH, Drive
7782548109	(2) TIRE, FRONT 315/80R22.5 Load Range L G289 WHA (GOODYEAR), 484 rev/mile, 68 MPH, All-Position
	Services Section:
40128	WARRANTY Standard for HV507, HV50B, HV607 Models, Effective with Vehicles Built July 1, 2017 or Later, CTS-2025A

Financial Summary
2021 HV507 SFA (HV507)

(US DOLLAR)

Description		Price
Factory List Prices:		
Product Items	$143,597.00	
Service Items	$0.00	
Total Factory List Price Including Options:		$143,597.00
Freight	$2,350.00	
Total Freight:		$2,350.00
Total Factory List Price Including Freight:		$145,947.00
Less Customer Allowance:		($51,962.00)
Total Vehicle Price:		$93,985.00
Total Sale Price:		$93,985.00
Total Per Vehicle Sales Price:		$93,985.00
Total Net Sales Excluding Taxes:		$93,985.00
MI TITLE	$15.00	
Total License, Title:		$15.00
Net Sales Price:		$94,000.00

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller:

Official Title and Date

Roger E Hauser

Authorized Signature

Accepted by Purchaser:

Firm or Business Name

Authorized Signature and Date

This proposal is not binding upon the seller without Seller's Authorized Signature

Official Title and Date

The TOPS FET calculation is an estimate for reference purposes only. The seller or retailer is responsible for calculating and reporting/paying appropriate FET to the IRS.

The limited warranties applicable to the vehicles described herein are Navistar, Inc.'s standard printed warranties which are incorporated herein by reference and to which you have been provided a copy and hereby agree to their terms and conditions.